


Videos at www.MORSEmfgco.com

MORCINCH™ Drum Handling System

- Automatically adjusts for 22" to 23.5" diameter steel or fiber drum . . .
. . .and accepts Diameter Adaptors for your smaller drums
- Includes a flexible cover on the cinch chain to help protect the sidewall of your drum
- Incorporates alloy cinch chain and hinge, and durable stress relief weld joints
- Accepts bolt-on Bracket Assembly to handle your rimless plastic drum
- Accepts bolt-on Top Rim Clamp for your rimmed plastic drum

The new MORcinch™ drum holder is a new feature of below-hook Kontrol-Karriers (shown right), Forklift-Karriers, Hydra-Lift Karriers and Vertical-Lift Drum Pourers

Automatically Adjusts!

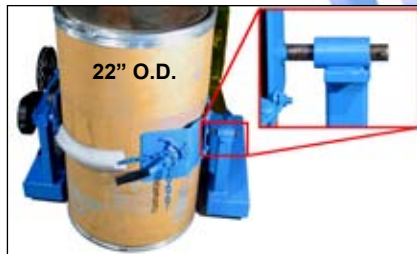

The MORcinch™ drum holder automatically adjusts from your 22" diameter drum to your 23.5" diameter drum and any size in between.



MORcinch™ drum holder showing alloy cinch chain with flexible chain cover, and ratchet handle used to secure your drum.

MORcinch™ Options and Accessories

Diameter Adaptors



Kontrol-Karriers

Diameter Adaptors allow you to handle a smaller drum with the same drum handler. Simply insert the correct size Diameter Adaptor into the drum holder. Lift the Diameter Adaptor out of the drum holder to return to handling a 55-gallon drum.

Diameter Adaptors for 17.5" diameter and smaller drums have brackets at top and bottom of the drum. They adjust to securely hold a drum up to 38" tall.



Model 55/30-19



Model 55/30-17.5

Bracket Assembly



The **Bracket Assembly** is required to handle your plastic drum without a top rim. It is also recommended to more securely handle a fiber drum. You can use the Bracket Assembly with a 55-gallon plastic, steel or fiber drum. The brace at top and bottom of the drum prevent it from slipping lengthways through the drum holder. It adjusts for a drum 31" to 39" tall.

Part # 4556-P Bracket Assembly.
Part # 4556M-P Spark Resistant Bracket Assembly.

Top Rim Clamp



The **Top Rim Clamp** grips the upper rim of your drum to prevent it from slipping through the drum holder. To handle a 55-gallon plastic drum with top rim, you **must** install either the Bracket Assembly or the Top Rim Clamp. You can use the Top Rim Clamp with a 55-gallon plastic, steel or fiber drum with suitable top rim.

Part # 4560-P Top Rim Clamp.
Part # 4560M-P Spark Resistant Top Rim Clamp.

| DIAMETER ADAPTORS | SPARK RESISTANT DIAMETER ADAPTORS | STAINLESS STEEL DIAMETER ADAPTORS | FITS DIAMETER | SHIP WEIGHT |
|-------------------|-----------------------------------|-----------------------------------|---------------|-------------|
| 55/30-20.5 | 55/30M-20.5 | 55/30SS-20.5 | 20" to 20.5" | 23 Lb. |
| 55/30-19 | 55/30M-19 | 55/30SS-19 | 18.5" to 19" | 24 Lb. |
| 55/30-17.5 | 55/30M-17.5 | 55/30SS-17.5 | 17" to 17.5" | 35 Lb. |
| 55/30-16 | 55/30M-16 | 55/30SS-16 | 15.5" to 16" | 35 Lb. |
| 55/30-14.5 | 55/30M-14.5 | 55/30SS-14.5 | 14" to 14.5" | 36 Lb. |

MADE IN USA